

# Mid-Size Tunnel Finishers

## WIDE-BODY TUNNEL FINISHER FOR FINISHING LAUNDERED POLY/COTTON AND SYNTHETIC FABRICS.

Thermostatically controlled, high velocity air circulates throughout the tunnel to wipe away wrinkles as heat relaxes the fabric and removes moisture. Air deflectors direct a vigorous airflow over the garments for outstanding finished quality and a soft, lint-free feel. Available with either a gas-heated or steam-heated finishing chamber in three different models to meet your specific production requirements.

- Stainless steel entrance enclosure preconditions garments
- Side and bottom steaming allows complete relaxation of fabric
- Smooth-formed stainless steel interior panels without exposed fasteners or sharp edges
- The CFS control panel places all tunnel function controls in one simple location
- Entrance and exit ends designed to reduce steam and heat loss
- Lift-off exterior panels with locking handles provide for easy serviceability while restricting unauthorized access
- Standard two-year parts warranty
- U.L. listed industrial control panel
- Colmac tested for quality assurance
- The best Service Department in the industry



Model CFS 1200 G/S with optional pendant conveyor


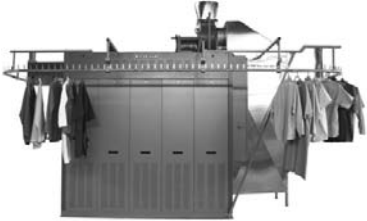
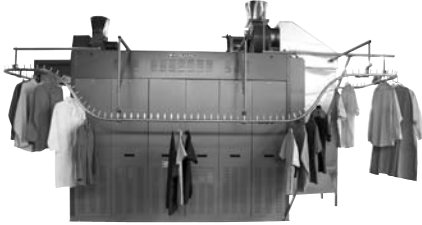


P.O. Box 72 • Colville, WA 99114 USA  
Tel: (509) 684-4505 • (800) 926-5622 • Fax: (509) 684-4500  
E-mail: sales@colmacind.com • Web site: www.colmacind.com

*...Start with accuracy, finish with quality*

SPECIFICATIONS	CFS 600	CFS 900	CFS 1200
Length with standard conveyor	161"	190"	213"
Width with standard conveyor	85"	85"	85"
Height	93"	93"	93"
Weight (pounds)	4,200	4,500	4,700
Garments/hr guideline*	*400	*600	*900
Electrical	3 phase		
Steam consumption	7-20 BHP depending on model		
Steam connection	1.25"	1.25"	1.25"
Condensate connection	.75"	.75"	.75"

### THREE MODEL SIZES TO FIT YOUR NEEDS

CFS 600 *400 / hour	
CFS 900 *600 / hour	
CFS 1200 *900 / hour	
<p><b>Mid-size tunnel finishers can be equipped with:</b></p> <p>Two different types of conveyors:  <b>Pendant</b> - For use with wire hangers  <b>Infiniti</b> - For use with wire, plastic or swivel-neck hangers</p> <p>Single or multiple station Hanging Systems</p>	

### OPTIONS:

- **PLC Control System** – Easy, one-touch selection of multiple programs which control temperature, conveyor speed and steam settings
- **High/Low Steam Selection** allows pushbutton selection of high or low (regulated) live steam pressure
- **Leveling Pads** for leveling on uneven floors and elevation for cleaning underneath
- **Steam Moisturizing System** enhances wrinkle removal from dry garments by increasing the moisture content of the live steam

#### For more information, contact:

**Colmac Industries, Inc.**  
**PO Box 72 • Colville, WA 99114 USA**  
**Toll Free: (800) 926-5622 • Phone: (509) 684-4505**  
**Fax: (509) 684-4500**  
**E-mail: sales@colmacind.com**  
**Web: www.colmacind.com**

Or your local Colmac Dealer:

\*Note production ratings are based on 65/35 shirts containing approximately 30% moisture retention.

